


10.3125Gb/s SFP+ 850nm
RTXM228-551

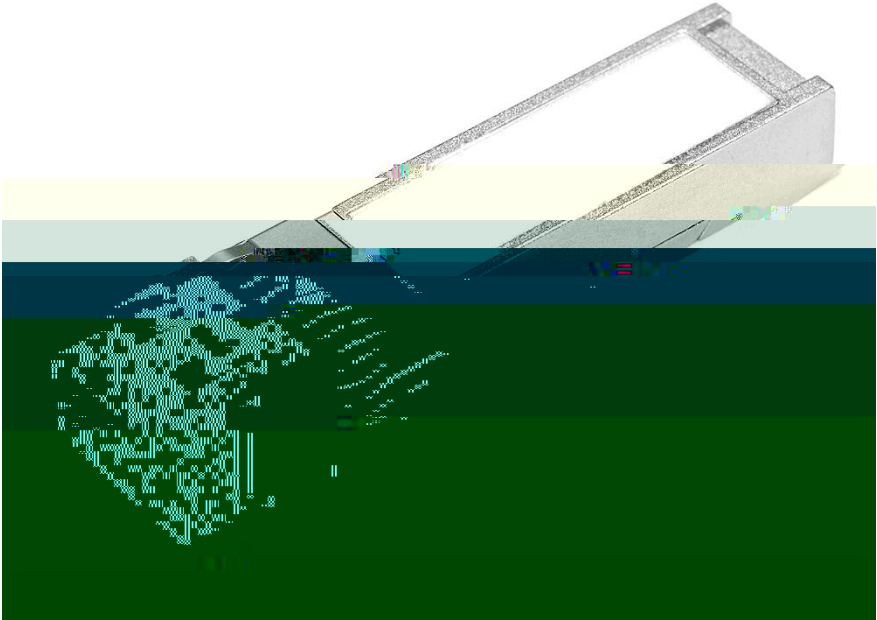


RTXM228-551	10Gigabit	850nm VCSEL	8.5	10.51875Gb/s
OM3		300	FC-PI-4, 10G FC, IEEE 802.3ae, SFF-8432,	
SFF-8431		I2C	SFF-8472.	

SFP+
RoHS
50µm OM3 MMF 300
850nm VCSEL
LC
20
1.0
0Ñ ~ 70Ñ
+3.3V±5%
SFF-8472

8.5/10.5 Gb/s Fiber

FC-PI-4 , 10GFC
IEEE 802.3ae 10GBASE-SR
SFF-8431
SFF-8472
SFF-8432

					(OMA)		(OM3)			
RTXM228-5		10.3125	850nm	-7.3~						10G SR
51	SFP+	Gb/s	VCSEL	-1.0dBm	PIN	-11.1dBm	0~70 °C	300m	DDM	8/10GFC

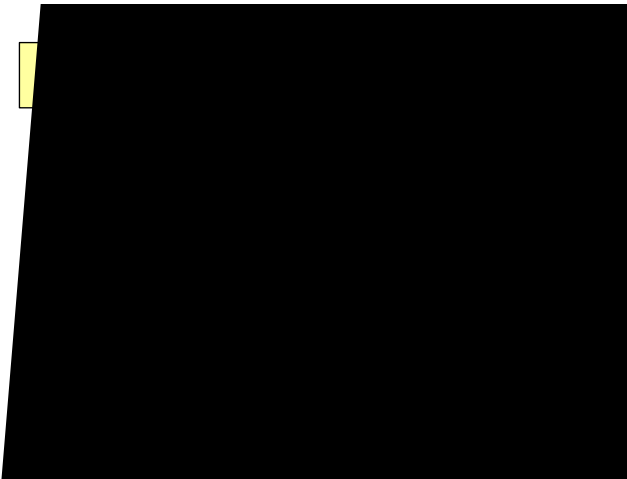

	Tc	°C	0		70
	Vcc	V	3.14	3.3	3.46
	BR	Gb/s	8.5		10.3125
50um MMF (OM3)(2000MHz.km)	L	m			300
	Vcc	V	3.14	3.3	3.46
	Icc	mA		180	285
	Pc	W			1.0
Transmitter					
	RIN	Ω	80	100	120
	VIN	mVp-p	180		700
Transmit Disable	VDIS	V	2		VcCHOST
Transmit Enable	VEN	V	VEE		VEE+0.8
Transmit Fault	VFA	V	2.2		VcCHOST
Transmit Fault	VFDA	V	VEE		VEE+0.4
Receiver					
	VOD	mVp-p	300		850
Output	trise	ps	28		
Output	tfall	ps	28		
LOS Fault	VLOSFT	V	2		VcCHOST
LOS Normal	VLOSNR	V	VEE		VEE+0.8

NOTE 1: Differen d J

Receiver				
	λ_C	nm	840	860
	P_{AVG}	dBm	-9.9	-1.0
(OMA)	R_{SENSE1}	dBm		-11.1
(OMA)	R_{SENSE1}	dBm		-7.5
		dB	12	
LOS Assert	LOS_A	dBm	-30	
LOS De-Assert	LOS_D	dBm		-14
LOS		dB	0.5	

NOTE 1: Equivalent extinction ratio specification for Fiber Channel

