10Gbps XFP Optical Transceiver RTXM226-440

Symbol	Unit	Min	Max	Note
V_{IH}	V	2.0	V_{cc3}+0.3	
V_{IL}	V	-0.3	0.8	
V_{OH}	V	V_{dd3}-0.5	V_{dd3}+0.3	1
V_{OL}	V	0.0	0.4	
V_{IH}	V	V_{dd3}*0.7	V_{dd3}+0.5	

1

10Gbps XFP Optical Transceiver RTXM226-440

Pin	Logic	Symbol	Name/Description	Note
1		GND	Module Ground	1
2		VEE5	Optional -5.2V Power Supply (Not Required)	
3	LVTTL-I	Mod_DeSel	Module De-select; When held low allows module to respond to 2-wire serial interface	
4	LVTTL-O	Interrupt	Interrupt; Indicates presence of an important condition which can be read over the 2-wire serial interface	2

10Gbps XFP Optical Transceiver RTXM226-440

Digital Diagnostic Functions

As define tE.6 h(n)E.6 ps

10Gbps XFP Optical Transceiver RTXM226-440

Package Outline

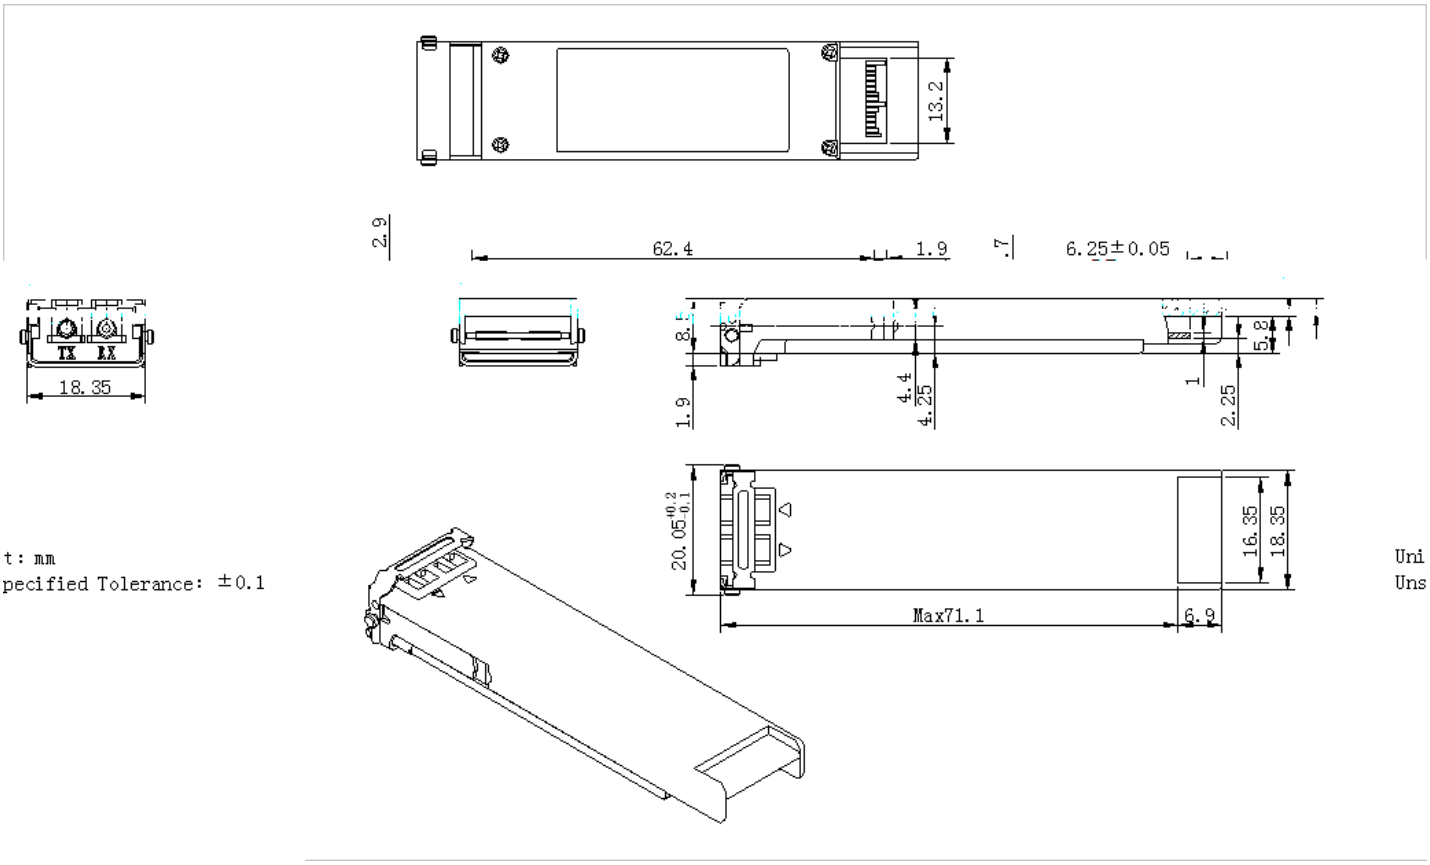

Regulatory Compliance

Feature	Test Method	Performance
Laser Eye Safety	FDA 21 CFR 1040.10 and 1040.11 IEC 60825-1: 1994+ A11: 1996+ A2: 2001 IEC 60825-2: 2004 + A1: 2006 EN 60825-1:1994+A1:2002+A2:2001 EN 60825-2: 2004	Compliant with Class 1 laser product
Electrostatic Discharge (ESD) to the Electrical Pins	MIL-STD-883E Method 3015.7 Human Body Model	Class 1 (>1.5kV)

Electrostatic Discharge